

Alumilite Steps part# 840121412968

DIRECTIONS FOR INSTALLATION & USE

2015-2021 FORD F150, 2017-2021 FORD RAPTOR, AND 2017-2021 FORD SUPERDUTY

CREW CAB (FULL 4-DOOR)

For technical support, call **1-800-626-8746** or email **sales@icionline.com** visit icionline.com to download instructions



ATTN: STATE OF CALIFORNIA CONSUMERS WARNING: CANCER AND REPRODUCTIVE HARM -WWW.P65WARNINGS.CA.GOV



WARNING: FAILURE TO COMPLY WITH INSTALLATION, SAFETY, AND PRODUCT USE INSTRUCTIONS MAY RESULT IN SERIOUS BODILY INJURY OR DEATH.

IMPORTANT NOTES

The contents of this installation and operation manual should be read and comprehended before initializing the installment of the above listed product. This will help minimize risk to injury through the installation process and through the operation of the product.

TABLE OF CONTENTS

1.SAFETY, WARNINGS, AND OPERATION0	2
2.PARTS AND TOOLS REQUIRED0	3
3.ICI STEP INSTALLATION	6
4.SOCIAL MEDIA REFERENCE0	7



SAFETY, WARNINGS, AND OPERATION


- Please ensure that the installer and end-user of this product have familiarized themselves with the contents in this manual. This manual provides important information about the possible safety and operation risks that are involved with the usage of this product.
- Our number one concern is the safety of our customers. This product is intended to be installed by a professional to minimize risk of an improper installation. Improper installations can lead to product damage, vehicle damage, and bodily injury. We ask that you reach out for professional assistance if this installation is beyond your capabilities.
- Please ensure to safeguard this installation and operation manual to reference in the future or to pass on to a future owner of the product.
- Please follow all instructions and take all safety precautions . necessary throughout the entirety of the installation process.

PARTS AND TOOLS REQUIRED

Hardware Kit includes:	Components List:		
(1). Qty x 16 = M8 x 35mm Hex Countersunk Head Bolts	(a). Side Bars - Qty x 2 1 Driver / 1 Passenger		
(2). Qty x 16 = M8 Finish Washers	(b). Front/Middle/Rear Brackets		
(3). Qty x 34 = M8 Nylock Nuts	- Qty x 6 3 Driver /3 Passenger (100540)		
(4). Qty x 34 = M8 x 24 x 2mm Flat Washers	(c). Hoop Steps (bolt on) - Qty x 4 2 Driver / 2 Passenger (100524)		

(5). Qty x 18 = M8 Plastic Retainers

(7). Allen Wrench included

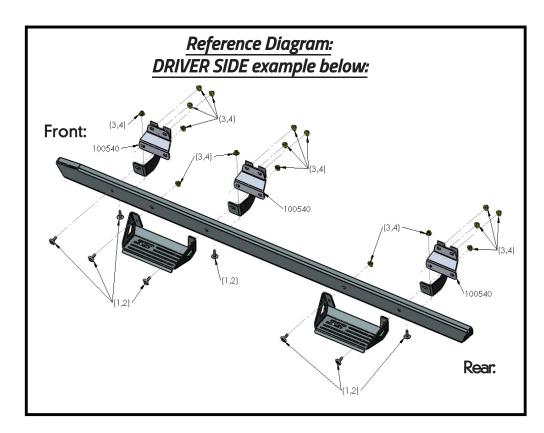

PARTS AND TOOLS REQUIRED

SYMBOL	DESCRIPTION	TOOL	DESCRIPTION
	HAZARDOUS WARNING	63 M	RATCHET/SOCKET WRENCH
	WARNING: SHARP ELEMENTS	13	SOCKETS : 13mm
	WARNING: CRUSHING OF HANDS	5	13mm
	WARNING: HOT SURFACE	J	(Allen wrench included)
	MANDATORY: WEAR EYE PROTECTION	\mathfrak{G}	EYE PROTECTION

ICI STEP INSTALLATION

Step 1 (Prep)

Beginning on the Driver's side, remove any steps if equipped. Next, locate the 3 sets of mounting points on the underside of the vehicle (Fig. 1). Underneath the rocker panel, there are three bracket locations, each location has three OE Factory bolts protruding out.




Figure 1.



Step 2 (Install **Brackets to Truck)**

Begin with the driver front bracket 100540. You will need (3 sets) of M8 nylock nuts and M8 flat washers. Use a 13mm socket and do not fully tighten yet. Once the front bracket is attached, move on to the middle and rear brackets, repeating the steps above for each bracket

Figure 2.

on Brackets) Next, locate the driver side bar. The front tip of each bar is sloped down to follow curve of door. Reference diagram on page 3. The top of the bar has a small lip, use the lip to hang the bar on the brackets. This will make the installation process easier and hands-free.

Step 3 (Hang bar



Figure 3.

ICI STEP INSTALLATION



Step 5 (Bolt Middle

Bracket to Bar and

the bar and front hoop step.

M8x35mm hex countersunk

finish washers. Use a 13mm

page 3. Do not fully tighten vet.

(3 sets) of M8 nylock nuts,

Front Hoop Step)

Figure 4.

Step 4 (Bolt Front Bracket to Bar)

Start by bolting the front bracket to the bar. It is the 1st bolt hole from the front. You will need (2 sets) of M8 nylock nuts, M8x35mm hex countersunk bolts. M8 flat washers, and M8 finish washers. Use a 13mm wrench and the provided Allen wrench. Do not fully tighten until all brackets and steps have been attached.





Step 6 (Bolt Rear Bracket to Bar and **Rear Hoop Step)**

Then, bolt the rear bracket to the bar and frear hoop step. Note that the bracket and hoop step share a bolt. You will need (3 sets) of M8 nylock nuts, M8x35mm hex countersunk bolts. M8 flat washers, and M8 finish washers. Use a 13mm wrench and the provided Allen wrench. Reference diagram on page 3. Do not fully tighten yet.

Figure 6.

ICI STEP INSTALLATION



Figure 7.

STEP 8 (Tighten Brackets to the Bar)

Once the 3 brackets are fully tightened to the truck, adjust the bar from front to back and tighten the bar to the brackets with a 13mm socket and provided Allen wrench. Make sure the bar is flush with the front and bottom face of the brackets as you are tightening them. Then, tighten the Hoop Steps to the bar.



STEP 9 (Finish) Check all hardware and make sure they are fully

tightened. Reference diagram on page 3 for hardware locations. Repeat Steps 1-9 for the Passenger

STEP 7 (Tighten

Brackets to Truck)

Make sure all 3 brackets are

Using a 13mm socket, fully

loose for now.

loosely fit to the vehicle and bar.

tighten the front bracket to the vehicle. Make sure the bracket is

flush with the mounting surface. Repeat on the middle and rear brackets, checking the bracket alignment as needed. Leave bar

Figure 8.



Figure 9.

*PRO TIP: When tightening the Finish Washers, hold the Allen Key tight so the Bolt does not spin. Then, tighten the Nut on the backside.

Side

TAG ICI ON SOCIAL MEDIA

AMAZING!


You have successfully completed the installation of your new Alumilite steps. Time to flex on your friends through Social Media! Don't forget to Tag us!



www.facebook.com/InnovativeCreationsInd



www.instagram.com/ici_usa



Hashtags:

#ICIUSA #ICIAlumilite #AlumiliteSteps #AlumiliteBumpers